


# DIMENSIONS

## JENNAIR® DUAL-FUEL RANGES

### PRODUCT

|                                      | 30" DUAL-FUEL RANGE | 36" DUAL-FUEL RANGE |
|--------------------------------------|---------------------|---------------------|
| Overall Width (A)                    | 29-7/8" (75.9 cm)   | 35-7/8" (91.1 cm)   |
| Bull nose Height (B)                 | 2-1/8" (5.4 cm)     | 2-1/8" (5.4 cm)     |
| Control Panel Height (C)             | 7-1/2" (19.1 cm)    | 7-1/2" (19.1 cm)    |
| Door Height (D)                      | 20-11/16" (52.6 cm) | 20-11/16" (52.6 cm) |
| Door Bottom to Handle Top: RISE™ (E) | 20" (50.8 cm)       | 20" (50.8 cm)       |
| Door Bottom to Handle Top: NOIR™ (E) | 20-5/8" (52.4 cm)   | 20-5/8" (52.4 cm)   |
| Toe-Kick Height (F)                  | 6-11/16" (17 cm)    | 6-11/16" (17 cm)    |

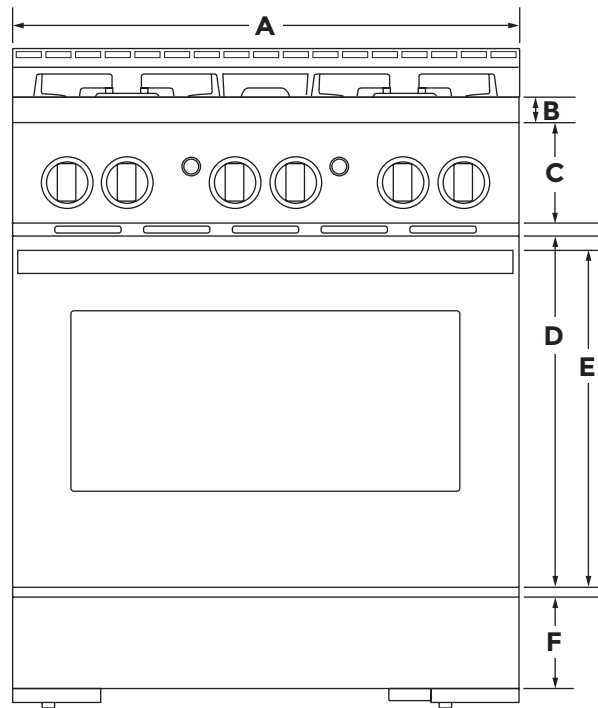

FRONT VIEW




**IMPORTANT:** Dimensional specifications are provided for planning purposes only. Do not make any cutouts based on this information. Refer to the Installation Guide before selecting cabinetry, verifying electrical/gas connections, making cutouts or beginning installation. All JennAir® appliances are appropriately UL, CUL or CSA approved.

# DIMENSIONS

## JENNAIR® DUAL-FUEL RANGES

### PRODUCT

|                                       | 30" DUAL-FUEL RANGE | 36" DUAL-FUEL RANGE |
|---------------------------------------|---------------------|---------------------|
| Depth with Control Panel Overhang (G) | 27-11/16" (70.3 cm) | 27-11/16" (70.3 cm) |
| Depth with Handle: RISE™ (H)          | 29-13/16" (75.7 cm) | 29-13/16" (75.7 cm) |
| Depth with Handle: NOIR™ (H)          | 29-5/16" (74.5 cm)  | 29-5/16" (74.5 cm)  |
| Depth with Door Fully Open (I)        | 46-1/2" (118.1 cm)  | 46-1/2" (118.1 cm)  |

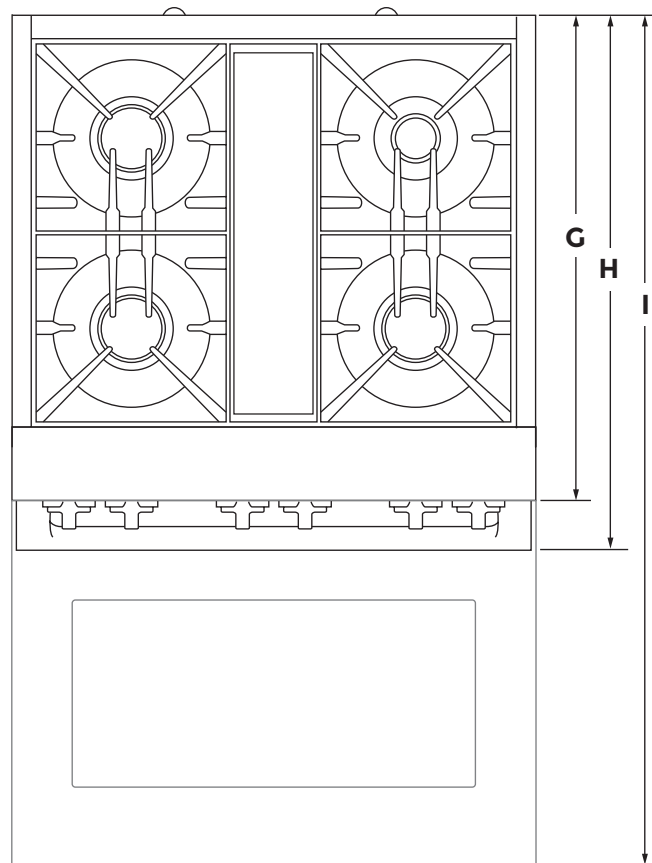


TOP VIEW

# DIMENSIONS

## JENNAIR® DUAL-FUEL RANGES

### PRODUCT

|  | 30" DUAL-FUEL RANGE         | 36" DUAL-FUEL RANGE | 48" DUAL-FUEL RANGE |
|--|-----------------------------|---------------------|---------------------|
| Grates Top Height (A)                              | 37-5/16" (94.8 cm)          | 37-5/16" (94.8 cm)  | 37-5/16" (94.8 cm)  |
| Cooking Surface Top Height (B)                     | 36" (91.4 cm)               | 36" (91.4 cm)       | 36" (91.4 cm)       |
| Door Top Height (C)                                | 27-13/16" (70.6 cm)         | 27-13/16" (70.6 cm) | 27-13/16" (70.6 cm) |
| Handle Top Height: RISE™ (D)                       | 27" (68.6 cm)               | 27" (68.6 cm)       | 27" (68.6 cm)       |
| Handle Top Height: NOIR™ (D)                       | 27-5/8" (70.2 cm)           | 27-5/8" (70.2 cm)   | 27-5/8" (70.2 cm)   |
| Toe-Kick Height (E)                                | 6-11/16" (17 cm)            | 6-11/16" (17 cm)    | 6-11/16" (17 cm)    |
|  | <b>OPTIONAL ACCESSORIES</b> |                     |                     |
| Height to Top of 9" Stainless Steel Backsplash (F) | 45" (114.3) min.            | 45" (114.3) min.    | 45" (114.3) min.    |

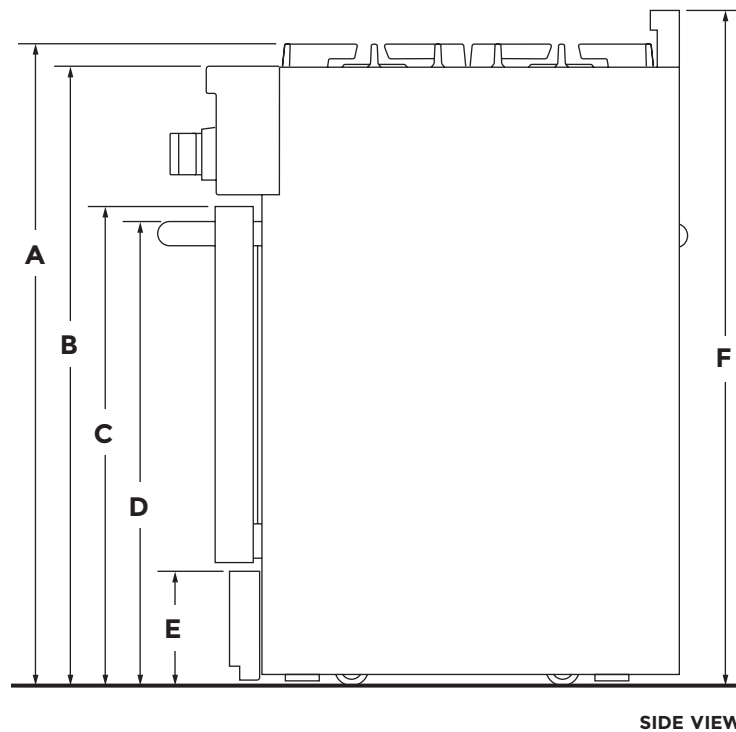


**IMPORTANT:** Minimum height dimensions are at the lowest point of the height adjustment range. When the leveling legs are fully extended, all heights have 1-3/4" (4.4 cm) of added height.

# DIMENSIONS

## JENNAIR® DUAL-FUEL RANGES

### PRODUCT

|                                       | 30" DUAL-FUEL RANGE | 36" DUAL-FUEL RANGE | 48" DUAL-FUEL RANGE |
|---------------------------------------|---------------------|---------------------|---------------------|
| Depth with Door Fully Open (G)        | 46-1/2" (118.1 cm)  | 46-1/2" (118.1 cm)  | 46-1/2" (118.1 cm)  |
| Depth with RISE™ Handle (H)           | 29-13/16" (75.7 cm) | 29-13/16" (75.7 cm) | 29-13/16" (75.7 cm) |
| Depth with NOIR™ Handle (H)           | 29-5/16" (74.5 cm)  | 29-5/16" (74.5 cm)  | 29-5/16" (74.5 cm)  |
| Depth with Control Panel Overhang (I) | 27-11/16" (70.3 cm) | 27-11/16" (70.3 cm) | 27-11/16" (70.3 cm) |
| Depth to Toe-Kick with Door (J)       | 26-3/8" (67 cm)     | 26-3/8" (67 cm)     | 26-3/8" (67 cm)     |
| Depth with RISE™ Door (K)             | 27-1/4" (69.2 cm)   | 27-1/4" (69.2 cm)   | 27-1/4" (69.2 cm)   |
| Depth with NOIR™ Door (K)             | 27-1/4" (69.2 cm)   | 27-1/4" (69.2 cm)   | 27-1/4" (69.2 cm)   |

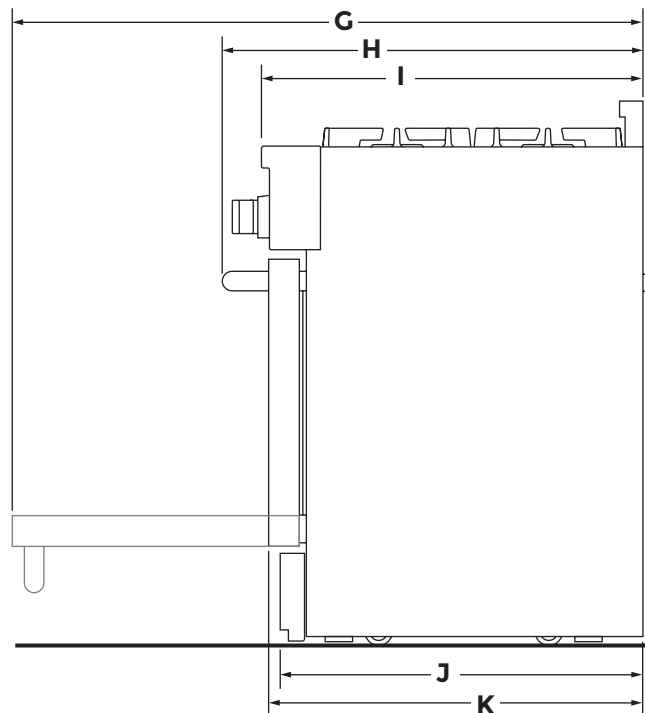


SIDE VIEW

# DIMENSIONS

## JENNAIR® DUAL-FUEL RANGES

PRODUCT

|   | 48" DUAL-FUEL RANGE |
|---|---------------------|
| Overall Width (A)                       | 47-7/8" (121.6 cm)  |
| Bull nose Height (B)                    | 2-1/8" (5.4 cm)     |
| Control Panel Height (C)                | 7-1/2" (19.1 cm)    |
| Door Heights ( D)                       | 20-11/16" (52.5 cm) |
| Door Bo ttoms to Handle Tops: RISE™ (E) | 20" (50.8 cm)       |
| Door Bo ttoms to Handle Tops: NOIR™ (E) | 20-5/8" (52.4 cm)   |
| Secondary Oven Door Width (F)           | 17-3/4" (45.1 cm)   |
| Main Oven Door Width (G)                | 29-5/8" (75.2 cm)   |
| Toe-Kick Height (H)                     | 6-11/16" (17 cm)    |

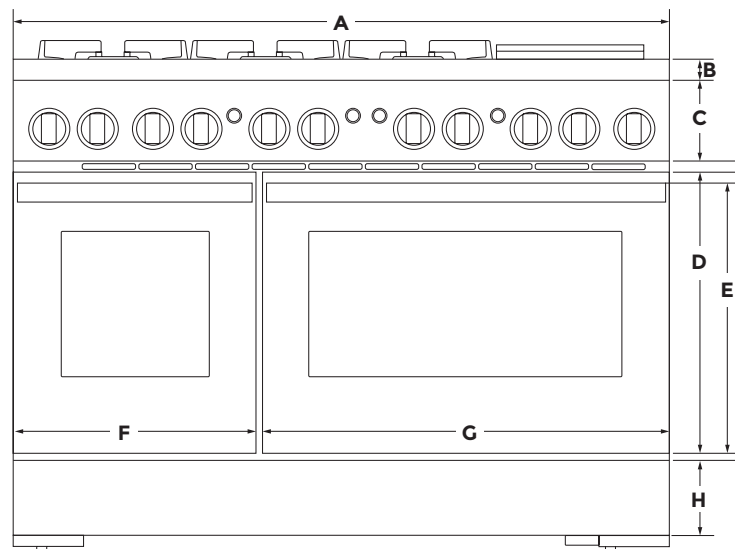


FRONT VIEW

# DIMENSIONS

## JENNAIR® DUAL-FUEL RANGES PRODUCT

|                                       | 48" DUAL-FUEL RANGE |
|---------------------------------------|---------------------|
| Depth with Control Panel Overhang (I) | 27-11/16" (70.3 cm) |
| Depth with Handles: RISE™ (J)         | 29-13/16" (75.7 cm) |
| Depth with Handles: NOIR™ (J)         | 29-5/16" (74.5 cm)  |
| Depth with Doors Fully Open (K)       | 46-1/2" (118.1 cm)  |

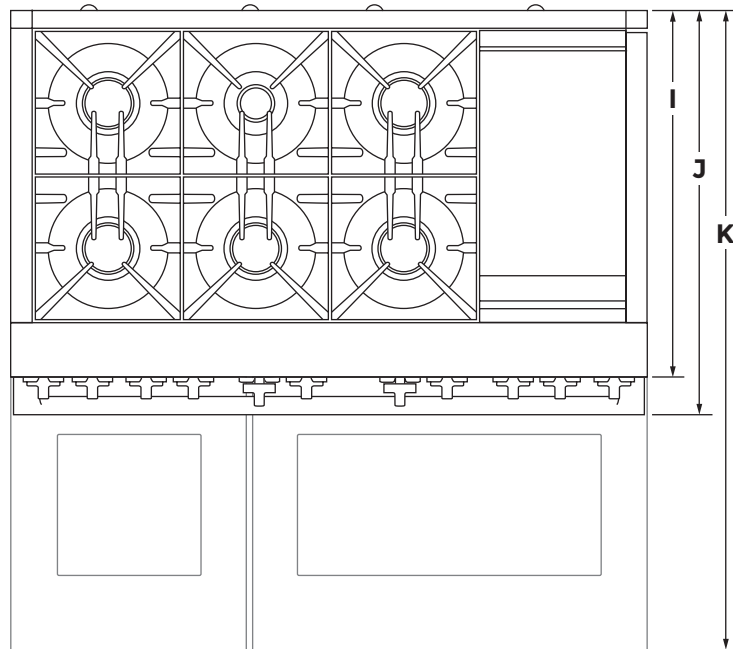

TOP VIEW


# DIMENSIONS

## JENNAIR® DUAL-FUEL RANGES

### OPENING AND CLEARANCE

|   | 30" DUAL-FUEL RANGE | 36" DUAL-FUEL RANGE | 48" DUAL-FUEL RANGE |
|---|---------------------|---------------------|---------------------|
| Combustible Area Above Cooking Surface Width (A)    | 30" (76.2 cm) min.  | 36" (91.4 cm) min.  | 48" (121.9 cm) min. |
| Bottom of Cabinet Height Above Cooking Surface (B)* | 42" (106.7 cm) min. | 58" (147.3 cm) min. | 58" (147.3 cm) min. |
| Bottom of Cabinet Height Above Countertop (C)       | 18" (38.1 cm) min.  | 18" (45.7 cm) min.  | 18" (45.7 cm) min.  |
| Distance to Fixed Wall or Combustible Material (D)  | 12" (30.5 cm) min.  | 12" (30.5 cm) min.  | 12" (30.5 cm) min.  |
| Opening Width (E)                                   | 30" (76.2 cm) min.  | 36" (91.4 cm) min.  | 48" (121.9 cm) min. |

\*If installing a hood or hood liner above the range, follow the hood or hood liner instructions for dimensional clearances above the cooking surface.

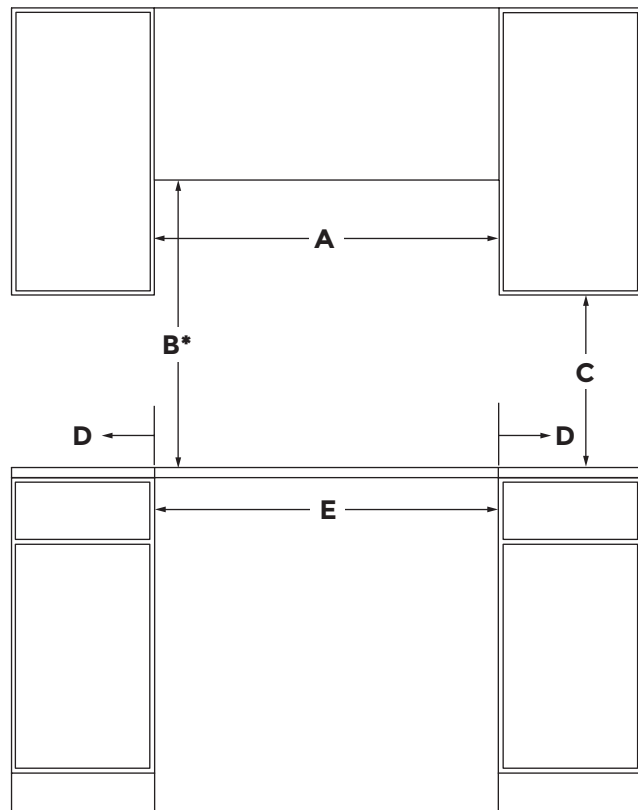

FRONT VIEW


# DIMENSIONS

## JENNAIR® DUAL-FUEL RANGES

### OPENING AND CLEARANCE

|                         | 30" DUAL-FUEL RANGE  | 36" DUAL-FUEL RANGE  | 48" DUAL-FUEL RANGE  |
|-------------------------|----------------------|----------------------|----------------------|
| Upper Cabinet Depth (F) | 13" (33 cm) max.     | 13" (33 cm) max.     | 13" (33 cm) max.     |
| Depth to Wall (G)*      | 1-1/2" (3.8 cm) min. | 1-1/2" (3.8 cm) min. | 1-1/2" (3.8 cm) min. |

\*If the back wall is constructed of a combustible material and a backsplash is not installed, a 1-1/2" (3.8 cm) minimum clearance is required.

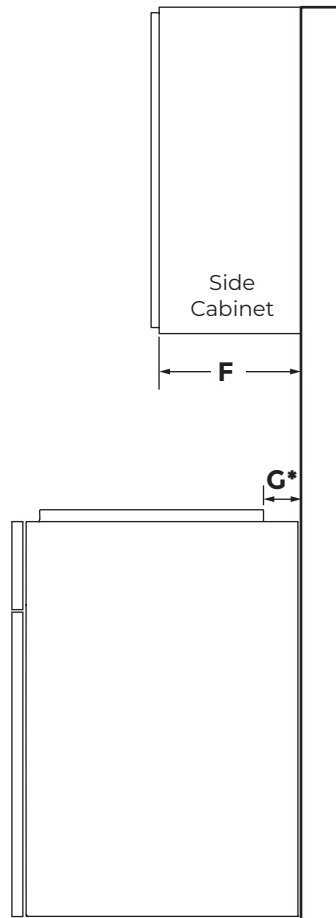

**SIDE VIEW**



# DIMENSIONS

## JENNAIR® DUAL-FUEL RANGES


### ELECTRICAL REQUIREMENTS

|                            | 30" DUAL-FUEL RANGE | 36" DUAL-FUEL RANGE | 48" DUAL-FUEL RANGE |
|----------------------------|---------------------|---------------------|---------------------|
| Electrical Zone Width (A)  | 22" (55.9 cm)       | 28" (71.1 cm)       | 40" (101.6 cm)      |
| Electrical Zone Height (B) | 15" (38.1 cm)       | 15" (38.1 cm)       | 15" (38.1 cm)       |
| Electrical Zone Depth (C)  | 5" (12.7 cm)        | 5" (12.7 cm)        | 5" (12.7 cm)        |


#### ELECTRIC REQUIREMENTS CHECKLIST

- A 240 volt, 60 Hz, fused, grounded circuit is required.
- For 30" and 36" ranges, use a 40-amp circuit.
- For 48" ranges, use a 50-amp circuit.
- A dedicated circuit is recommended.

#### RECOMMENDED ELECTRICAL ZONE

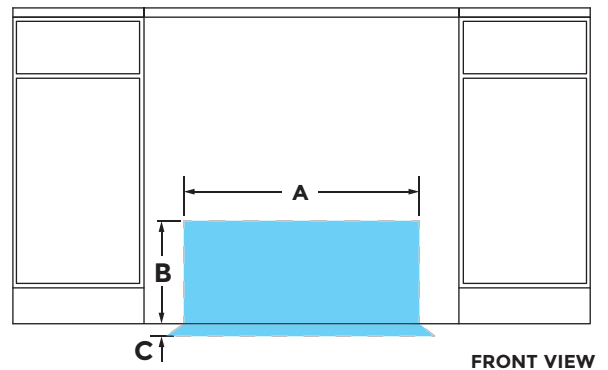

#### WIDTH TO ELECTRICAL CONDUIT

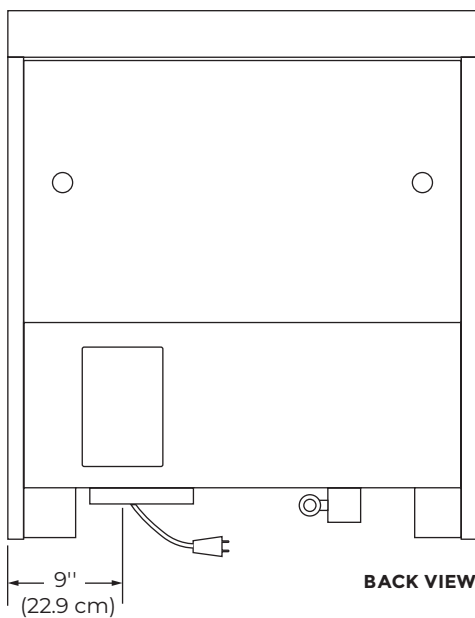

IF YOU HAVE QUESTIONS ABOUT YOUR ELECTRICAL SUPPLY, CALL A LICENSED, QUALIFIED ELECTRICIAN.


# DIMENSIONS

## JENNAIR® DUAL-FUEL RANGES


### GAS REQUIREMENTS

|   | 30" CONNECTED DUAL-FUEL RANGE | 36" CONNECTED DUAL-FUEL RANGE | 48" DUAL-FUEL RANGE |
|---|-------------------------------|-------------------------------|---------------------|
| Gas Opening Width (A)                         | 6" (15.2 cm)                  | 14" (35.6 cm)                 | 24" (61 cm)         |
| Gas Opening Height (B)                        | 3" (7.6 cm)                   | 3" (7.6 cm)                   | 3" (7.6 cm)         |
| Gas Opening Depth (C)                         | 5" (12.7 cm)                  | 5" (12.7 cm)                  | 5" (12.7 cm)        |
| Distance from Side Cabinet to Gas Opening (D) | 6" (15.2 cm)                  | 6" (15.2 cm)                  | 6" (15.2 cm)        |
| Width to Gas Inlet (E)                        | 12-3/4" (32.4 cm)             | 12-3/4" (32.4 cm)             | 12-3/4" (32.4 cm)   |

#### RECOMMENDED GAS ZONE

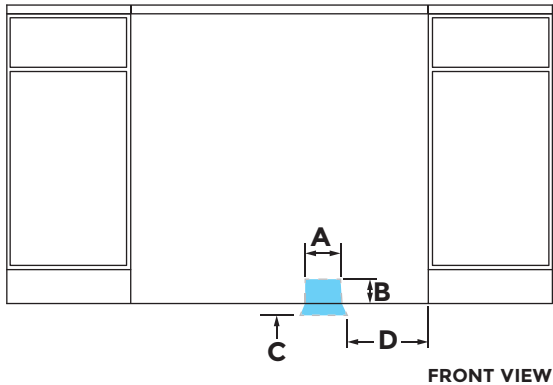

#### WIDTH TO GAS INLET

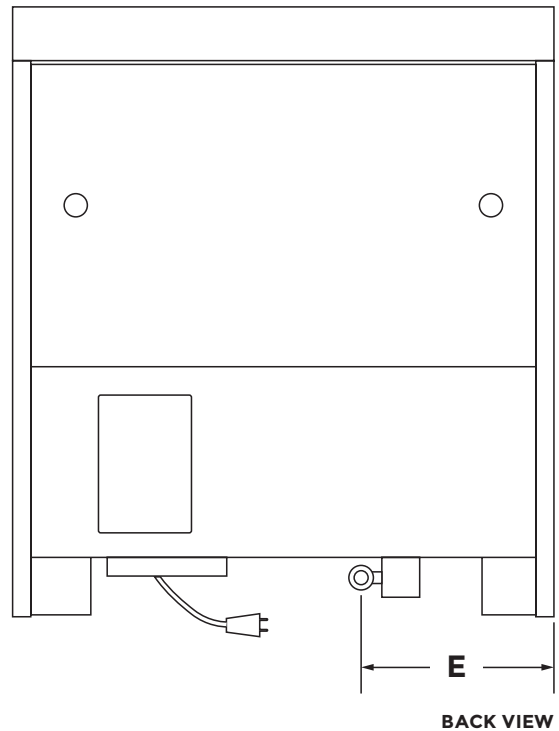

IF YOU HAVE QUESTIONS ABOUT YOUR GAS SUPPLY, CALL A LICENSED, QUALIFIED SERVICE TECHNICIAN.