

30" INDUCTION RANGE JIS1450D - 29%"x 36"x 285/16"

PRODUCT DIMENSIONS



FRONT VIEW



TOP VIEW


MODEL#		JIS14	JIS1450D	
		in	cm	
A	Overall width	297//8	75.9	
В	Width of door/drawer	297//8	75.9	
C	Height from cooktop to top of vent	13/16	2.0	
D	Space between door and control panel	13/16	2.1	
E	Height to top of handle Pro-Style® Stainless	227/8	58.1	
	Euro-Style Stainless	227/8	58.1	
F	Height of door	231/4	59.0	
G*	Height to top of cooktop edge	36	91.4	
Н	Height of warming drawer	65/16	16.0	
I	Space between door and warming drawer	13/16	2.0	
J	Depth from front of console to back of range (max.)	2713/16	70.7	
K	Depth from handle to back of range (max.) Pro-Style® Stainless	2815/16	73.5	
	Euro-Style Stainless	285/16	71.9	

^{*} With leveling legs screwed all the way in. Pange can be raised approximately 1" (2.5 cm) by adjusting the leveling legs.



30" INDUCTION RANGE JIS1450D - 29%" x 36" x 285/16"

DIMENSIONS AS INSTALLED




MODEL#		JIS1450D	
		in	cm
A *	Height to top of cooking surface (min.)	35½	90.2
B *	Height to top of door (min.)	3011/16	78.0
C*	Height to top of handle (min.) Pro-Style® Stainless	30½	77.5
	Euro-Style Stainless	30½	77.5
D *	Height to top of warming drawer (min.)	67/8	17.5
E*	Height to top of countertop (min.)	35 ¹³ / ₁₆	91.0
F	Depth with door fully open	50%6	128.5
G	Depth with handle Pro-Style® Stainless	28 ¹⁵ / ₁₆	73.5
	Euro-Style Stainless	285/16	71.9
Н	Depth without handle	2713/16	70.7
I	Depth without door	25	63.5
J	Depth with door	265/16	66.8
K	Height of countertop channel	1 13/16	4.6
L	Depth to countertop channel	1 3/16	3.0



^{*} With leveling legs screwed all the way in. Pange can be raised approximately 1" (2.5 cm) by adjusting the leveling legs.

30" INDUCTION RANGE JIS1450D - 291/8" x 36" x 285/16"

OPENING/CLEARANCE DIMENSIONS

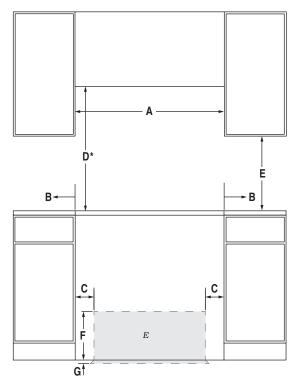

FRONT VIEW


MODEL#		JIS1450D	
		in	cm
A	Width of combustible area above cooking surface (min.)	30	76.2
В	Width from cooktop to fixed wall or other combustible material (min.)	3	7.6
C	Width from electrical installation area to cabinet (min.)	413/16	12.2
D*	Height to bottom of uncovered wood or metal cabinet above cooking surface (min.)	30	76.2
E	Height to bottom of uncovered wood or metal cabinet (min.)	18	45.7
F	Height of electrical installation area (max.)	711/16	19.5
G	Depth of electrical installation area (max.)	311/16	9.4
Н	Depth of upper cabinet (recommended)	13	33.0
I	Width of cutout	30	76.2
J	Width to power cord	23/4	7.0
E	Recommended junction box location		

^{*} Dimension can be reduced by 6" (15.2 cm) when bottom of wood or metal cabinet is covered by not less than 1/4" (0.6 cm) flame retardant millboard covered with not less than No. 28 MSG sheet metal, 0.015" (0.4 mm) stainless steel, 0.024" (0.6 mm) aluminum or 0.020" (0.5 mm) copper.

If installing a hood or microwave hood combination above the range, follow the hood or microwave hood combination instructions for dimensional clearances above the cooking surface.

A dedicated circuit is recommended. Minimum length of power cord

BACK VIEW

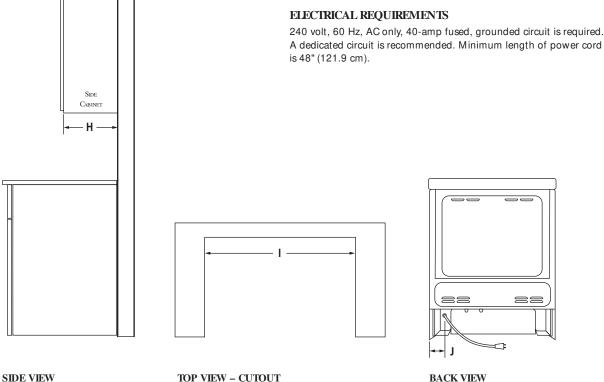

IMPORTANT: Dimensional specifications are provided for planning purposes only. Do not make any cutouts based on this information. Refer to the Installation or Use & Care Guide BEFOÆ selecting cabinetry, verifying electrical/gas connections, making cutouts or beginning installation. All Jenn-Air® appliances are appropriately UL, CUL or CSA approved.

TOP VIEW - CUTOUT

