


DETAILED PLANNING DIMENSIONS

18" ICE MACHINES

KUID308H/ KUID508H/ KUIO338H – D 24" x W 17¹¹/₁₆" x H 25⁵⁵/₃₂" (depth without handle)

PRODUCT DIMENSIONS

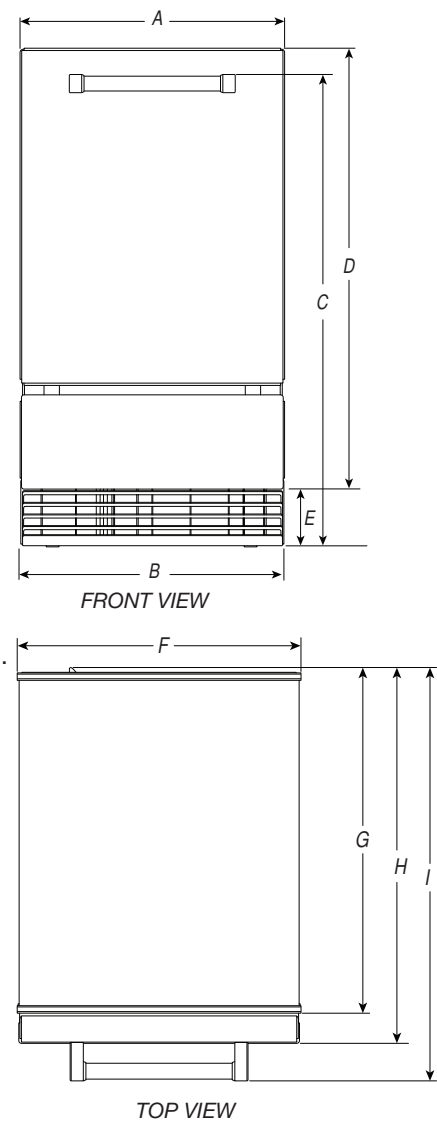

MODEL #		KUID308H/ KUID508H/ KUIO338H	
		in	cm
A	Width	17 ¹¹ / ₁₆	44.95
B	Width of grille	17 ²⁵ / ₃₂	45.17
C	Height to top of handle	31 ¹⁵ / ₁₆	81.1
D	Height of door	22 ⁵³ / ₆₄	57.98
E	Height of grille	3 ⁵⁷ / ₆₄	9.9
F	Width of recessed ice machine to door fully open	17 ⁷ / ₈	45.4
G	Depth without door	21 ³ / ₄	55.26
H	Depth with door (min.)	23 ⁴¹ / ₆₄	60.05
I	Depth with handle	26 ¹ / ₆₄	66.1

IMPORTANT: Dimensional specifications are provided for planning purposes only.
Do not make any cutouts based on this information. Refer to the Installation or Use & Care Guide before selecting cabinetry, verifying electrical/gas connections, making cutouts or beginning installation.
All KitchenAid® appliances are appropriately UL, CUL or CSA approved.

KitchenAid®


DETAILED PLANNING DIMENSIONS

18" ICE MACHINES

KUID308H/ KUID508H/ KUIO338H – D 24" x W 17¹¹/₁₆" x H 25⁵⁵/₃₂" (depth without handle)

MODEL #		KUID308H/ KUID508H/ KUIO338H	
		in	cm
A*	Height to top of door (min.)	33 ⁴⁷ / ₆₄	85.7
B*	Height to top of handle (min.)	31 ¹⁵ / ₁₆	81.1
C*	Height to top of grille (min.)	10 ¹⁷ / ₆₄	26.1
D*	Height of recessed ice machine (min.)	33 ⁵ / ₈	85.43
E	Depth with door open 90° (min.)	44 ³ / ₈	112.72
F	Depth with handle (min.)	26 ¹ / ₆₄	66.1
G	Depth with door (min.)	23 ¹⁹ / ₃₂	59.95
H	Depth without door (min.)	21 ⁵ / ₈	54.91
I	Depth of grille (min.)	23 ³³ / ₆₄	59.71

* Add 1" (2.5 cm) to the height dimension when leveling legs are fully extended.

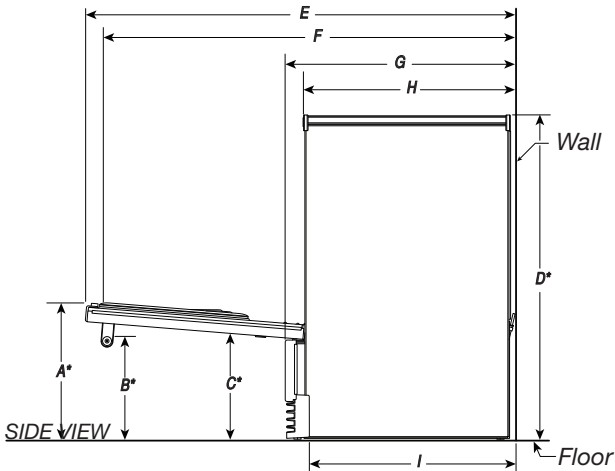

IMPORTANT: Dimensional specifications are provided for planning purposes only.
Do not make any cutouts based on this information. Refer to the Installation or Use & Care Guide before selecting cabinetry, verifying electrical/gas connections, making cutouts or beginning installation.
All KitchenAid® appliances are appropriately UL, CUL or CSA approved.




DETAILED PLANNING DIMENSIONS

18" ICE MACHINES

KUID308H/ KUID508H/ KUIO338H – D 24" x W 17¹¹/₁₆" x H 25⁵⁵/₃₂" (depth without handle)

OPENING/CLEARANCE DIMENSIONS

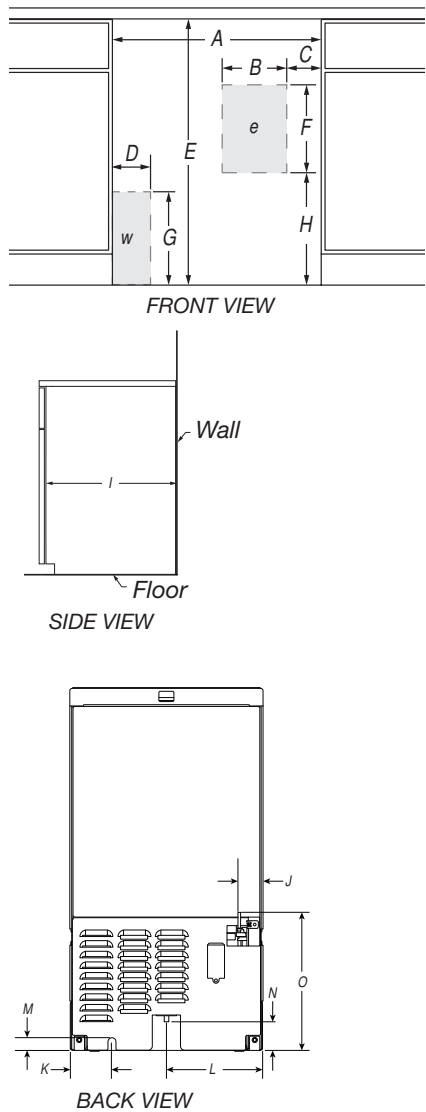

MODEL #		KUID308H/ KUID508H/ KUIO338H	
		in	cm
A*	Width (min.)	18	45.7
B*	Width of outlet location	6	15.0
C*	Outlet location – distance from side	1	2.5
D*	Width of water connection location	3½	8.9
E	Height (min.)	34	86.4
F	Height of outlet location	8	20.3
G	Height of water connection location	9	22.9
H	Outlet location – distance from bottom	12	30.5
I	Depth of cabinet (min.)	24	61.0
J	Water line location – distance from side	2 ¹⁵ / ₃₂	6.28
K	Power supply – distance from side	3 ²³ / ₃₂	9.45
L	Drain hose – distance from side	8 ⁴⁹ / ₆₄	22.25
M	Power supply – distance from bottom	1 ¹⁷ / ₆₄	3.19
N	Drain hose – distance from bottom	2 ⁴¹ / ₆₄	6.79
O	Water line location – distance from bottom	11 ⁹ / ₁₆	29.38
e	Recommended electrical connection location		
w	Recommended water connection location		

* Install 3/4" (1.9 cm) front hinge-side spacer flush with face of adjacent cabinet and 3/4" (1.9 cm) back hinge-side spacer 6" (15.2 cm) from back wall.

ELECTRICAL REQUIREMENTS

115 V, 60 Hz, AC only, 15 or 20 A fused, grounded circuit is required. A dedicated circuit is recommended. Use an outlet that cannot be turned off by a switch. Do not use an extension cord.

WATER PRESSURE REQUIREMENTS

A cold water supply with water pressure between 30 and 120 psi (207 and 827 kPa) is required to operate the ice maker. Call a licensed, qualified plumber with any questions about the water pressure.

Reverse Osmosis Water Supply

IMPORTANT: The use of a reverse osmosis system with this product is not recommended. However if you do use reverse osmosis, follow these instructions.

IMPORTANT: The pressure of the water coming out of a reverse osmosis system going to the water inlet valve of the ice machine needs to be between 30 and 120 psi (207 and 827 kPa). If a reverse osmosis water filtration system is connected to the cold water supply, the water pressure to the reverse osmosis system needs to be a minimum of 40 to 60 psi (276 to 414 kPa).

IMPORTANT: Dimensional specifications are provided for planning purposes only.
Do not make any cutouts based on this information. Refer to the Installation or Use & Care Guide before selecting cabinetry, verifying electrical/gas connections, making cutouts or beginning installation. All KitchenAid® appliances are appropriately UL, CUL or CSA approved.

