


BUILT-IN/COUNTERTOP MICROWAVE OVEN WITH CONVECTION


JM C3215BS – 21³/₄" x 12¹³/₁₆" x 20¹/₁₆"

PRODUCT DIMENSIONS




FRONT VIEW

| MODEL # | | JM C3215BS | |
|---------|--------------------------|----------------------------------|------|
| | | in | cm |
| A | Overall width | 21 ³ / ₄ | 55.3 |
| B | Width of door | 17 ³ / ₄ | 45.1 |
| C | Width of control panel | 4 | 10.2 |
| D | Overall height | 12 ¹³ / ₁₆ | 32.6 |
| E | Overall depth with door | 20 ¹ / ₁₆ | 51.0 |
| F | Depth with door open 90° | 36 ¹¹ / ₁₆ | 93.2 |

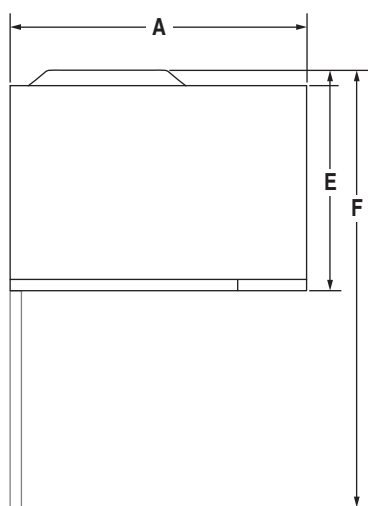

TOP VIEW

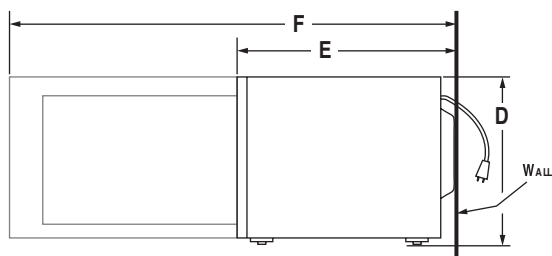


SIDE VIEW

BUILT-IN/COUNTERTOP MICROWAVE OVEN WITH CONVECTION

JM C3215BS – 21 3/4" x 12 13/16" x 20 1/16"

OPENING/CLEARANCE DIMENSIONS

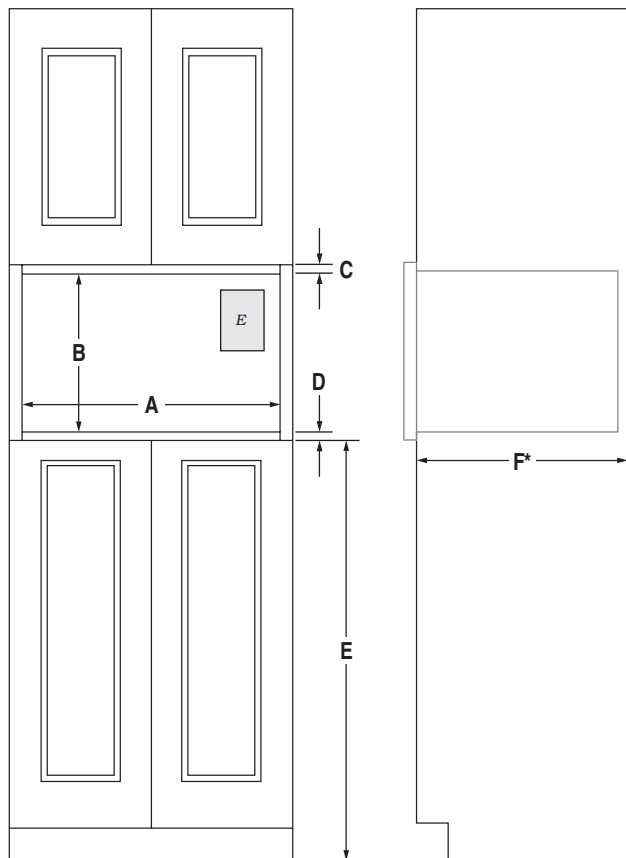

FRONT VIEW

SIDE VIEW

| MODEL # | | JM C3215BS | |
|---------|---|------------|-----------|
| | | in | cm |
| A | Width of cutout | 23 1/8 | 58.7 |
| B | Height of cutout (min.-max.) | 17-17 1/8 | 43.2-43.5 |
| C | Top of cutout to bottom of upper cabinet (min.) | 2 | 5.1 |
| D | Bottom of cutout to top of single oven (min.) | 3 | 7.6 |
| | Bottom of cutout to top of cabinet door (min.) | 1 9/16 | 4.0 |
| E | Recommended height from bottom of cutout to floor | 36 | 91.4 |
| F* | Depth of cutout | 18-22 1/2 | 45.7-57.2 |
| E | Recommended electrical connection location | | |

* Depth requirements depend upon receptacle and its location within or outside of recommended region. See installation guide for more details.
NOTE: Trim kit frame extends 1 1/8" (2.7 cm) above and below the cutout opening.


ELECTRICAL REQUIREMENTS

120 volt, 60 Hz, AC only, 15- or 20-amp fused, electrical supply is required. A time-delay fuse or dedicated circuit is recommended. Minimum length of power cord is 30" (76.2 cm). Do not use an extension cord.

VENTING REQUIREMENTS

If microwave oven is built in, a trim kit is required for proper ventilation.

TRIM KIT DIMENSIONS

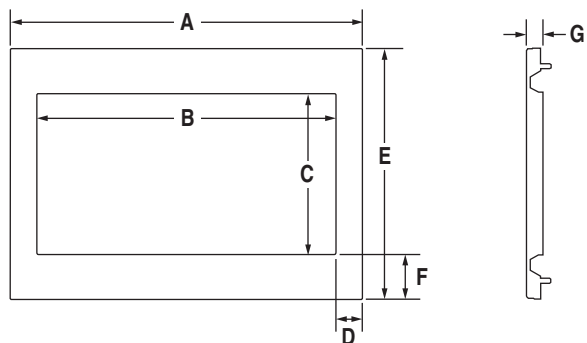

| | M KC2150AS | | M KC2157AS | | |
|---|-------------------|--------|------------|--------|------|
| | in | cm | in | cm | |
| A | Overall width | 29 3/4 | 75.6 | 26 7/8 | 68.2 |
| B | Width of opening | 22 3/4 | 57.8 | 22 3/4 | 57.8 |
| C | Height of opening | 12 1/4 | 31.1 | 12 1/4 | 31.1 |
| D | Width of frame | 3 1/2 | 8.9 | 2 1/16 | 5.2 |
| E | Overall height | 19 1/8 | 48.6 | 19 1/8 | 48.6 |
| F | Height of frame | 3 7/16 | 8.7 | 3 7/16 | 8.7 |
| G | Depth of frame | 1 3/16 | 3.0 | 1 3/16 | 3.0 |