Undercounter Refrigerator

PRODUCT MODEL NUMBERS

WUR50X24EM

Electrical: A 115-Volt, 60-Hz., AC-only 15- or 20- amp fused (or circuit breaker), grounded electrical supply is required. It is recommended that a separate circuit serving only your refrigerator be provided. Use an outlet that cannot be turned off by a switch. Do not use an extension cord.

OVERALL DIMENSIONS

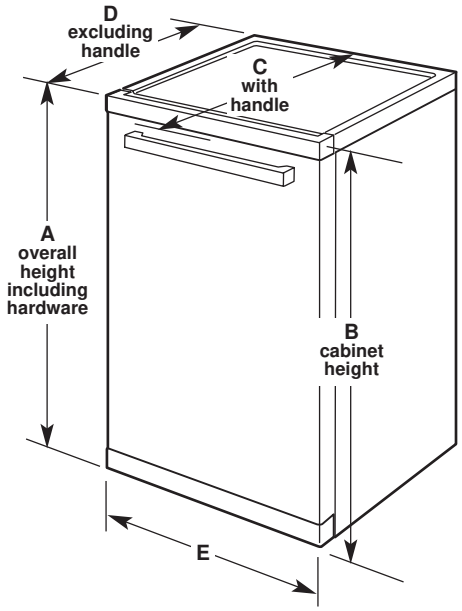

Model	Maximum Height "A"	Minimum Height "B"	Depth - With Handles "C"	Depth - Without Handles "D"	Width - Cabinet "E"	Depth - With Door Open 90º
WUR50X24EM	35⅛" (89.2 cm)	34⅜" (87.3 cm)	26⅜" (67 cm)	24⅜" (61.9 cm)	23¾" (60.3 cm)	47" (119.38 cm)

LOCATION REQUIREMENTS

If your refrigerator is to be built-in, to ensure proper ventilation for your refrigerator, allow FOR¼" in. (6.35 mm) space on each side and at the top. When installing your refrigerator next to a xed wall and the hinge side is next to the wall, leave 2½" (6.35 cm) minimum to allow for the door to swing open. To open door wider, leave more space.

NOTE: Do not install the refrigerator near an oven, radiator, or other heat source, nor in a location where the temperature will fall below 55°F (13°C).

For best performance, do not install the refrigerator behind a cabinet door or block the base grille.

Because Whirlpool Corporation policy includes a continuous commitment to improve our products, we reserve the right to change materials and specifications without noticel

Dimensions are for planning purposes only. For complete details, see Installation nstructions packed with product. Specifications subject to change without notice.

Ref. W10811054B
12/15